



SmCo Motors™

PERMANENT MAGNET MOTORS

456 Series



Features

- Compatible with Any Pump
- 0.97 Power Factor
- 100% Stainless Steel Construction
- 93% Efficiency
- Patents Pending

Benefits



- Low Winding Temps
- 54' Shorter & 3,000lbs Lighter than Comparable 480HP IMs Resulting in Safer & Easier Deployment
- Customized Solutions Available



33HP/ft
Power Density



450°F / 230°C
Winding Rating

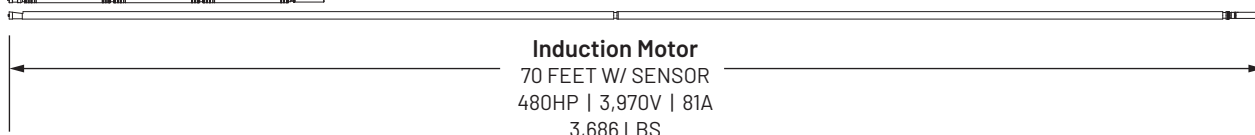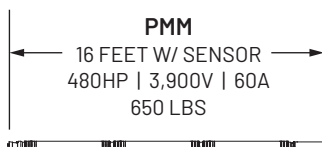

Motor Specifications

OD	HP	Volts	Amps	Length	kVA	Drive Amps
456	160	1,300	60	5.4ft	135	163
	320	2,600	60	9.9ft	270	325
	480	3,900	60	14.5ft	405	488

ALL MOTOR CONFIGURATIONS ALWAYS IN STOCK

Contact Us for More Information



REYNOLDS LIFT TECHNOLOGIES
100% MADE IN TEXAS

